

# HomeControl DoorbellCam


Monitor, view and speak to visitors at any time, from anywhere.

Versatile, robust and convenient, the Pyronix HomeControl DoorbellCam is our new outdoor, wire-free doorbell camera that offers main-entrance protection and two-way communication.

The battery-powered doorbell camera comes with Full-HD video, 130 degree wide-angle view, motion detection, real-time notifications and push to talk function. With these helpful features, users are able to see exactly what's happening on the doorstep and can answer the door, even when they're not there.

Open the door to new sales opportunities with the Pyronix DoorbellCam.

Stay connected to home

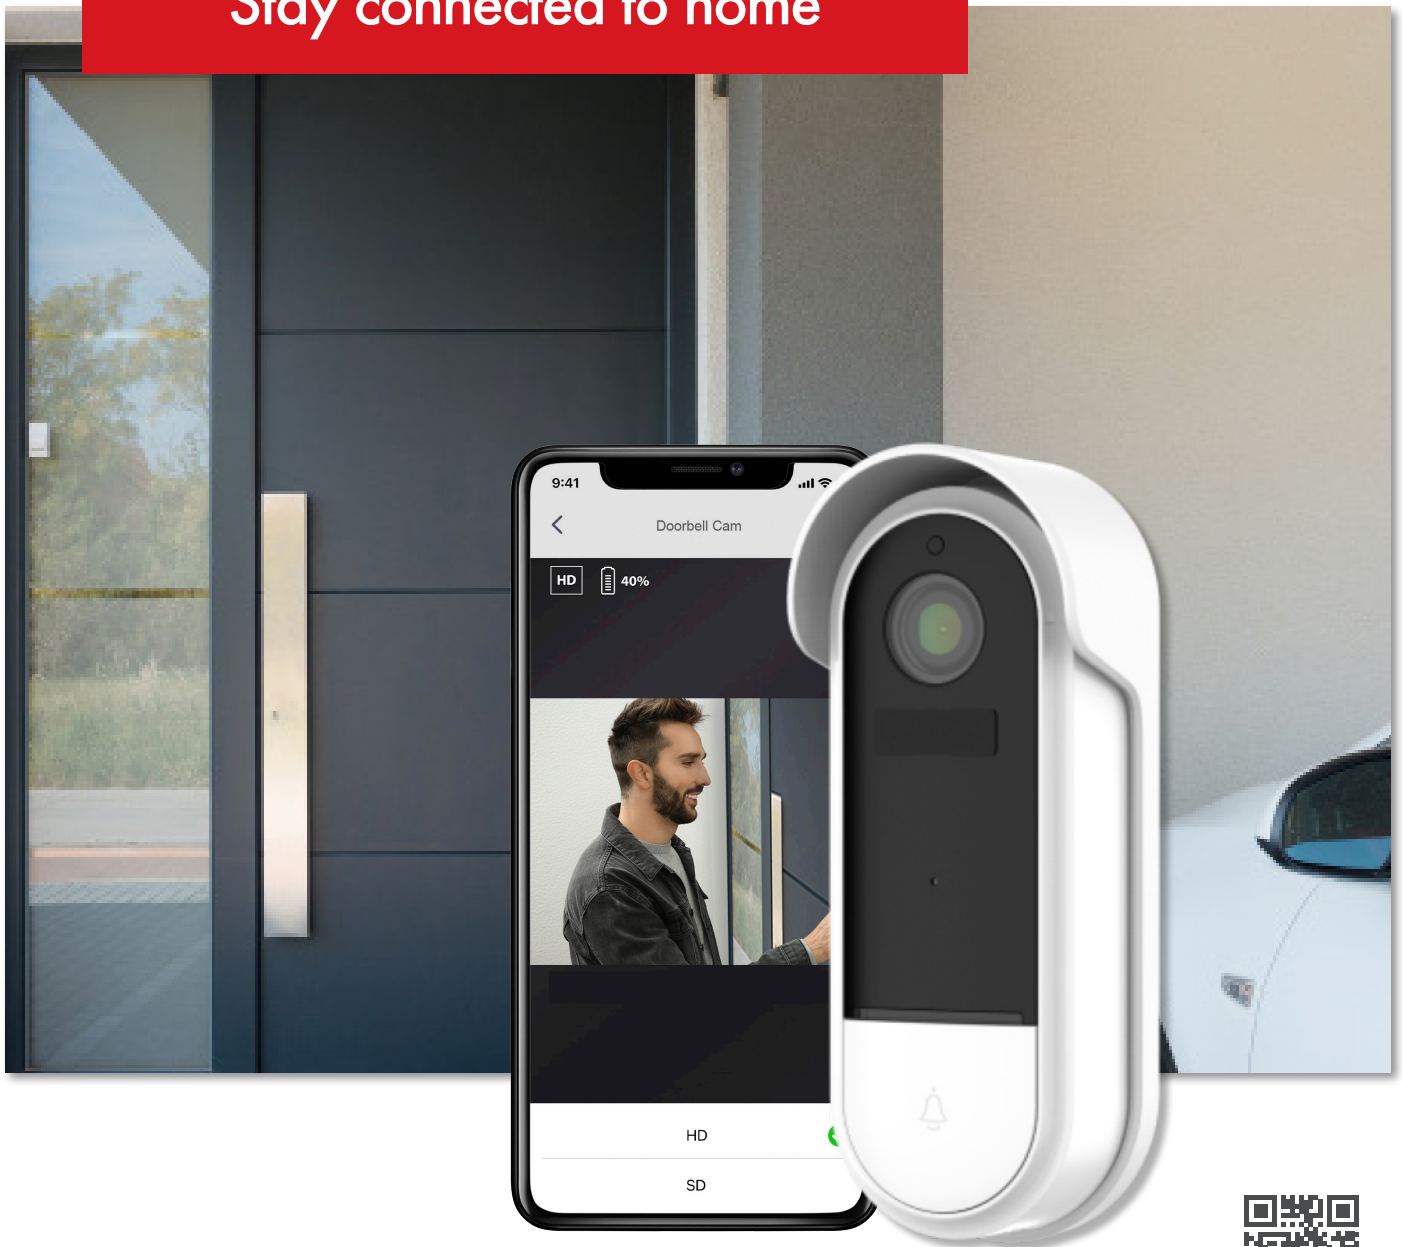

## HomeControl DoorbellCam

### Home is in your smartphone

Receive real-time alerts from the front door straight to your mobile device and stay connected to home; never missing a visitor or delivery again. With the DoorbellCam's inbuilt mic and speaker, welcoming visitors and directing deliveries has never been easier, whether home or away.

### Hear real-time notifications at home

Localised alerts are made possible with the DoorbellChime. The battery-powered (3 x AA – so no PSU required), audible chime has been designed for full audio coverage throughout the property, offering four levels of volume.

Up to four Chimes can be positioned within a property, so homeowners can remain assured they'll always hear a caller.

### Designed to make life safer and easier

Detect the presence of unwanted strangers around the property and mask out nuisance alarms triggered by pets and other movement with the doorbell's inbuilt PIR detector, which is configurable to three different levels of sensitivity for custom settings depending on environment.

### HomeControl2.0 compatible

Monitor, see and speak with visitors straight from our HomeControl2.0 app. Experience seamless integration in properties with an existing Pyronix system or install as a stand-alone product.

The HomeControl2.0 app offers quick and easy set up via Wi-Fi. Simply pair the devices and set up is complete.

### Long-lasting battery life

There's no need to regularly charge the DoorbellCam with its large 6700 mAh battery. It can last up to six months on standby and between two and three months with wake up 10 times a day. Low battery notifications can be set to preference and the battery can be recharged using the included cable.

### Live Snapshot and Capture

Capture high-quality, Full-HD live photos and videos with the DoorbellCam.

### Full-HD, Wide-Angle View

See, speak with and welcome guests with a 130 degree field of view and crisp 1080p HD video footage – even in low light with our automatic Night Mode.

### Record, Playback and Save Video Footage

With an SD card inserted, attention-catching videos and photos can be saved, played back and examined. Our 32GB SD card, which can be purchased separately, allows users to record up to 3000 minutes of footage in local storage.

### Easy Installation

As the DoorbellCam doesn't require a 240VAC supply, it offers huge flexibility with installation. All fixtures and fittings are included with the product, so it can be installed wherever needed. It also features fast pairing with the DoorbellChime, operating through its own RF channel.

### DOORBELL/KIT-SDC


The DoorbellCam, Chime and SD card can be purchased separately or as a convenient, ready-to-install kit, saving you time on individual product ordering.

### Build a Smarter Home

With our range of smart home products, like the SmartPlug, the DoorbellCam can be integrated to make life easier with helpful scenes and automations. Set up the home to automatically switch a light on if the doorbell is pressed at night and make it safer for your customers to reach the door.

# HomeControl DoorbellCam

<b>Partcode</b>	DOORBELL/CAM
<b>Camera</b>	
Image Sensor	1/2.9" 2Megapixel CMOS
Effective Pixels	1920(H) x 1080(V)
Shutter	1/15~1/10,000s
Min. Illumination	Color 0.1Lux@F2.0, Black/White 0.01Lux@F2.0
IR Distance	Night visibility up to 10m
Day/Night	Auto(ICR)/Colour/B&W
WDR	DWDR
Lens & FOV(D)	3.2mm@F2.0,130°
<b>Video &amp; Audio</b>	
Compression	H.264
Bit Rate	32Kbps~2Mbps
Frame Rate	1~25fps
Dual Stream	Yes
Audio Input/Output	Built-in mic/speaker
<b>Network</b>	
Alarm Trigger	Button triggering, PIR detection
Wireless Security	64/128-bit WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
Communication Protocol	HTTP, DHCP, DNS, TCP/IP
Interface Protocol	Private
Wireless	2.4G Wi-Fi (IEEE802.11b/g/n)
Mobile Phone OS	iOS 9 or later, Android 7 or later
Security	AES128
Max. User Access	4
<b>Battery &amp; PIR</b>	
Capacity	6700mAh rechargeable Li batteries
Stand-by Current	200-800 $\mu$ A (average)
Working Current	150-200 mA (IR off)
Stand-by Time	upto 10 months
Working Time	3 months (10 times wake up per day)
PIR Detection Range	Max. 5m
PIR Angle	100°
<b>General</b>	
Operating Temperature	-20 °C to 50 °C
IP Rating	IP65
Power Supply	DC 5V/1A, AC 12~24V
Power Consumption	Max. 2W
Storage	SD card(Max.128GB)
Optional Accessory	Wireless Chime
Dimensions	57 x 41 x 145 mm
Net Weight	200g
<b>Order codes</b>	
DOORBELL/KIT-SDC	Doorbell Camera, Chime, SD card
DOORBELL/CAM	Doorbell Camera
DOORBELL/CHIME	Chime
DOORBELL/BACKET	Bracket

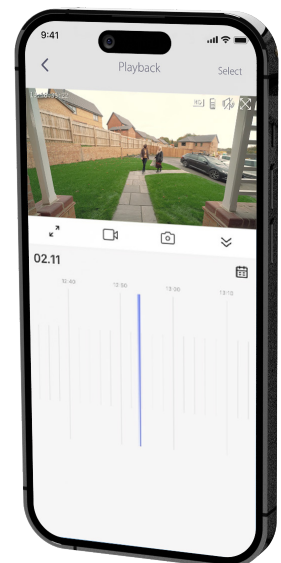

# Doorbell Chime

Partcode	DOORBELL/CHIME
General	
Power	3 x AA LR6 1.5V batteries
Reset	Support
Ringtone	4 optional melodies
Volume	Adjustable
Frequency	433/868/915MHz
Transmission Distance	Max. 100m (No obstacle)
Dimensions	75 x 75 x 32mm
Weight	80g




# Doorbell Bracket

## Designed to achieve the optimal angle for crystal-clear front door footage

The new bracket allows you to adjust the camera's angle, increasing motion detection functionality in many cases and enabling users to identify and engage with visitors, deliveries, and security concerns more effectively, thanks to improved visibility.

What's more, installation is quick and easy with just two screws to secure it to the wall, and an additional four to attach the DoorbellCam to the bracket.

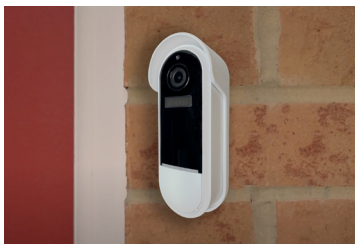

Follow us on LinkedIn  @pyronixLtd 

[www.facebook.com/pyronix](https://www.facebook.com/pyronix)  @pyronix 

Pyronix Limited, Secure House, Braithwell Way, Hellaby, Rotherham, South Yorkshire, S66 8QY, UK

T: +44 (0)1709 700 100 E: [sales@pyronix.com](mailto:sales@pyronix.com) W: [www.pyronix.com](http://www.pyronix.com)